

LightScope ZWP® Self-Supporting Non-Armored Figure-8 Outdoor Drop Cable, 1-6 fiber Arid Core construction with 0.109 in messenger, central loose tube


## Product Classification

<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber drop cable
<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America

## Standards And Qualifications

<b>Cable Qualification Standards</b>	ANSI/ICEA S-110-717
--------------------------------------	---------------------

## Representative Image

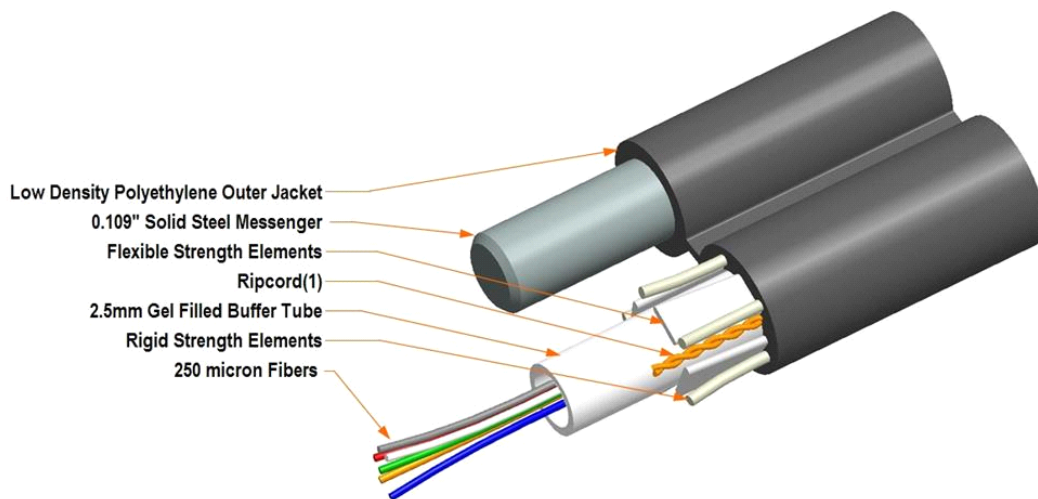

## General Specifications

<b>Cable Type</b>	Central loose tube
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-filled

## Construction Materials

<b>Fiber Type Solution</b>	G.652.D and G.657.A1
<b>Jacket Material</b>	PE

<b>Total Fiber Count</b>	1
<b>Fiber Type</b>	G.652.D and G.657.A1
<b>Fiber Type, quantity</b>	1
<b>Fibers per Subunit, quantity</b>	1
<b>Jacket Color</b>	Black
<b>Jacket UV Resistance</b>	UV stabilized

## Dimensions

<b>Buffer Tube/Subunit Diameter</b>	2.50 mm   0.10 in
<b>Cable Weight</b>	77.0 kg/km   52.0 lb/kft
<b>Diameter Over Jacket</b>	5.10 mm   0.20 in
<b>Diameter Over Messenger Jacket</b>	4.30 mm   0.17 in
<b>Height Over Jacket</b>	10.70 mm   0.42 in
<b>Subunit, quantity</b>	1

## Physical Specifications

<b>Minimum Bend Radius, loaded</b>	7.7 cm   3.0 in
<b>Minimum Bend Radius, unloaded</b>	5.1 cm   2.0 in
<b>Tensile Load, long term, maximum</b>	400 N   90 lbf
<b>Tensile Load, short term, maximum</b>	1334 N   300 lbf
<b>Vertical Rise, maximum</b>	529.0 m   1736.0 ft

## Environmental Specifications

<b>Environmental Space</b>	Aerial, self-support
<b>Installation Temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

<b>Compression</b>	10 N/mm   57 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	35 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	1.47 N-m   1.08 ft lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7

**Water Penetration** 24 h  
**Water Penetration Test Method** FOTP-82 | IEC 60794-1 F5

## Environmental Test Specifications

**Cable Freeze** -2 °C | 28 °F  
**Cable Freeze Test Method** FOTP-98 | IEC 60794-1 F15  
**Drip** 70 °C | 158 °F  
**Drip Test Method** FOTP-81 | IEC 60794-1 E14  
**Heat Age** -40 °C to +85 °C (-40 °F to +185 °F)  
**Heat Age Test Method** IEC 60794-1 F9  
**Low High Bend** -30 °C to +60 °C (-22 °F to +140 °F)  
**Low High Bend Test Method** FOTP-37 | IEC 60794-1 E11  
**Temperature Cycle** -40 °C to +70 °C (-40 °F to +158 °F)  
**Temperature Cycle Test Method** FOTP-3 | IEC 60794-1 F1

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## Included Products

DB-8W-LT (Product Component—not orderable) — LightScope ZWP® Singlemode Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable