# 760237725 | TENIO-C6H-SLE-12-N



# TENIO<sup>™</sup> High Density Fiber Optic Splice Closure, Gel Cable sealing, 12 pre-installed 24-splice trays

- Single-ended, toolless closure for splicing feeder, access and drop cables
- Features modular building blocks that fastens installation and reduces inventory
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- Compatible with CommScope's CWDM modules and optical splitter trays

#### Product Classification

Regional Availability	EMEA
Product Type	Single-ended, rectangular fiber closure
Product Brand	TENIO™
Product Series	TENIO
General Specifications	
Cable Entry Drop Port Style	Gel block
Cable Entry Main Port Style	Gel block
Cable Ports Quantity, total	6 multi-out ports (30 cables)
Cable Sealing Type	Compressed gel
Closure Sealing Type	Side latch
Closure Style	Single-ended
Color	Black
Flash Test Valve	None
Mounting	Wall
Network Area Type	Distribution   Drop
Splice Tray Included, quantity	12
Splice Tray Type Included	24-way, heat shrink
Splices per Tray, quantity	24
Splicing Capacity, Single Fusion, maximum	288
Splicing Type, Supported	Single fusion
Dimensions	

#### Dimensions

Height

230 mm | 9.055 in

Page 1 of 3

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: June 10, 2023



## 760237725 | TENIO-C6H-SLE-12-N


Width

Length

134 mm | 5.276 in 449 mm | 17.677 in 16 mm | 0.63 in

## Ordering Tree

Main Cable Diameter, maximum

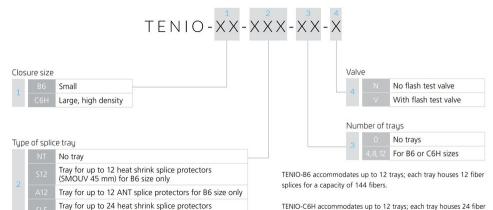

TENIO-C6H accommodates up to 12 trays; each tray houses 24 fiber splices for a capacity of 288 fibers.

## Material Specifications

(SMOUV 45mm) for C6H size only

Material Type

Impact-resistant polymer

1 kg | 2.205 lb

#### **Environmental Specifications**

Environmental Space	Below ground   Buried
Qualification Standards	IEC 61300, 2 m waterhead
Packaging and Weights	
Packaging quantity	1
Packaging Type	Box   Carton

## Weight, net

# Regulatory Compliance/CertificationsAgencyClassificationCHINA-ROHSAbove maximum concentration valueISO 9001:2015Designed, manufactured and/or distributed under this quality management systemROHSCompliant/ExemptedUK-ROHSCompliant/Exempted

Page 2 of 3

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: June 10, 2023

**COMMSCOPE**<sup>®</sup>





Page 3 of 3

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: June 10, 2023

