
U4GLGLGCD

Base Product



Ultra Low Loss ULL TeraSPEED® LC/APC G.B to LC/APC G.B. Ruggedized fanout Cable, 12-Fiber, LSZH, 12 fiber PmP 2.0 mm /B2ca

Product Classification

Regional Availability Asia | Australia/New Zealand | Europe | Latin America | Middle

East/Africa | North America

Portfolio CommScope®

Product Type Ruggedized fanout

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales

> Representative | For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

General Specifications

Color, boot A Green Color, connector A Green Color, boot B Green Color, connector B Green **Construction Type** Stranded **Furcation Color** Yellow LC/APC

Interface Feature, connector A Grade B performance

Interface, Connector B LC/APC

Interface Feature, connector B Grade B performance

Jacket Color Yellow Fibers per Subunit, quantity 12

Total Fibers, quantity 12

Dimensions

Interface, Connector A


Cable Assembly Length Range (m) 3 - 30510 - 999Cable Assembly Length Range (ft)

Page 1 of 3



U4GLGLGCD

Ordering Tree

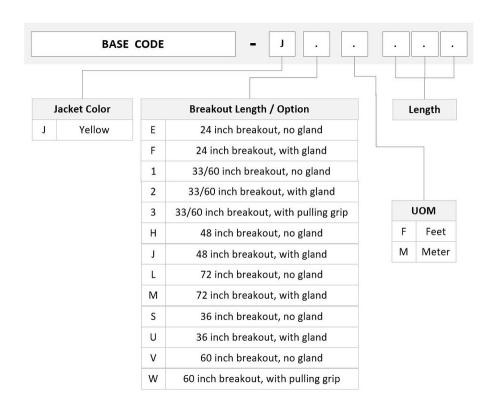

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+60 \,^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F}$)

EN50575 CPR Cable EuroClass Fire Performance B2ca

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Page 2 of 3



U4GLGLGCD

REACH-SVHC

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS

Compliant

UK-ROHS

Compliant





