


# 4189604/10 | 5524M WHITE REEL



Ultra II® 5524M Category 5e U/UTP Cable, plenum, white jacket, 8 pair count, 1000 ft (305 m) length, reel

**OBSOLETE**

## Product Classification

<b>Regional Availability</b>	North America
<b>Portfolio</b>	Uniprise®
<b>Product Type</b>	Twisted pair cable
<b>Product Brand</b>	Ultra II®
<b>Ordering Note</b>	Available only in reels


## General Specifications

<b>Product Number</b>	5524M
<b>ANSI/TIA Category</b>	5e
<b>Cable Component Type</b>	Horizontal
<b>Cable Type</b>	U/UTP (unshielded)
<b>Conductor Type, singles</b>	Solid
<b>Conductors, quantity</b>	16
<b>Jacket Color</b>	White
<b>Note</b>	All electrical transmission tests include swept frequency measurements
<b>Pairs, quantity</b>	8
<b>Transmission Standards</b>	ANSI/TIA-568.2-D   CENELEC EN 50288-6-1   ISO/IEC 11801 Class E

## Dimensions

<b>Height Over Jacket</b>	4.978 mm   0.196 in
<b>Width Over Jacket</b>	10.338 mm   0.407 in
<b>Cable Length</b>	304.8 m   1000 ft
<b>Jacket Thickness</b>	0.457 mm   0.018 in
<b>Conductor Gauge, singles</b>	24 AWG

## Cross Section Drawing

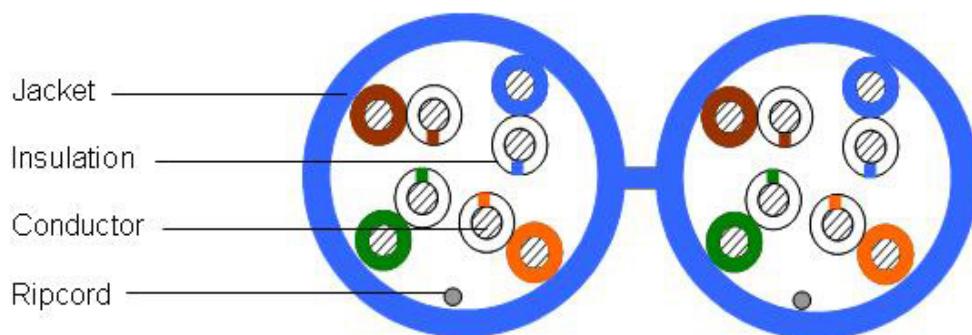

## Electrical Specifications

<b>Characteristic Impedance</b>	100 ohm
<b>dc Resistance Unbalance, maximum</b>	5 %
<b>dc Resistance, maximum</b>	9.38 ohms/100 m   2.859 ohms/100 ft
<b>Delay Skew, maximum</b>	15 ns
<b>Dielectric Strength, minimum</b>	1500 Vac   2500 Vdc
<b>Mutual Capacitance at Frequency</b>	4.6 nF/100 m @ 1 kHz
<b>Nominal Velocity of Propagation (NVP)</b>	71 %
<b>Operating Frequency, maximum</b>	350 MHz
<b>Operating Voltage, maximum</b>	80 V
<b>Remote Powering</b>	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
<b>Safety Voltage Rating</b>	300 V

# 4189604/10 | 5524M WHITE REEL

## Electrical Cable Performance

<b>CS</b>	CommScope	<b>NEXT</b>	Near End Crosstalk (dB/100m)
<b>STD</b>	Refers to the standard value listed under Transmission Standards in the Electrical Specifications above	<b>PSNEXT</b>	Power Sum Near End Crosstalk (db/100m)
<b>TYP</b>	Typical Electrical Performance	<b>ACRF</b>	Attenuation to Crosstalk Ratio - Far End (dB/100m)
<b>IL</b>	Insertion Loss (dB/100m)	<b>RL</b>	Return Loss (dB)
<b>ACR</b>	Attenuation to Crosstalk Ratio (dB/100m)	<b>ELTCTL</b>	Equal Level Transverse Conversion Transfer Loss (dB/100m)
<b>PSACR</b>	Power Sum Attenuation to Crosstalk Ratio (dB/100m)		
<b>PSACRF</b>	Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)		
<b>TCL</b>	Transverse Conversion Loss (dB/100m)		

Freq. MHz	IL			NEXT			ACR			PSNEXT			PSACR			ACRF			PSACRF			RL		
	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP
1	2	2	1.8	70.3	65.3	85	68.3	63.3	83.1	68.3	62.3	82.6	66.3	60.3	80.8	67.8	63.8	79.8	65.8	60.8	78	20	20	34.8
4	3.9	4.1	3.7	61.3	56.3	75.9	57.3	52.2	72.2	59.3	53.3	73.4	55.3	49.2	69.7	55.8	51.8	68.1	53.8	48.8	66.3	23.3	23	35.1
8	5.6	5.8	5.3	56.8	51.8	70.8	51.2	46	65.6	54.8	48.8	68.5	49.2	43	63.3	49.7	45.7	62.2	47.7	42.7	60.5	25	24.5	35.9
10	6.2	6.5	5.9	55.3	50.3	69.7	49.1	43.8	63.8	53.3	47.3	67.4	47.1	40.8	61.5	47.8	43.8	60.3	45.8	40.8	58.5	25.5	25	36.8
16	7.9	8.2	7.6	52.2	47.2	66.3	44.3	39	58.7	50.2	44.2	64	42.3	36	56.4	43.7	39.7	56.3	41.7	36.7	54.5	25.5	25	37.9
20	8.9	9.3	8.5	50.8	45.8	64.8	41.9	36.5	56.3	48.8	42.8	62.4	39.9	33.5	53.9	41.8	37.8	54.4	39.8	34.8	52.5	25.5	25	37.6
25	10	10.4	9.5	49.3	44.3	63.3	39.3	33.9	53.8	47.3	41.3	61	37.3	30.9	51.5	39.8	35.8	52.5	37.8	32.8	50.6	24.8	24.3	37.9
31.25	11.3	11.7	10.7	47.9	42.9	61.8	36.6	31.2	51.2	45.9	39.9	59.5	34.6	28.2	48.9	37.9	33.9	50.5	35.9	30.9	48.6	24.1	23.6	37.7
62.5	16.3	17	15.3	43.4	38.4	57.3	27.1	21.4	42	41.4	35.4	55.1	25.1	18.4	39.7	31.9	27.9	44.4	29.9	24.9	42.5	22	21.5	33.5
100	21	22	19.6	40.3	35.3	54.5	19.3	13.3	34.9	38.3	32.3	52.1	17.3	10.3	32.5	27.8	23.8	40.4	25.8	20.8	38.4	20.6	20.1	31
155	26.8		24.8	37.4		51.2			26.4	35.4		49	8.7		24.1			36.7	22		34.7	19.3		28.9
200	30.9		28.4	35.8		48.9	4.9		20.4	33.8		46.6	2.9		18.2	21.8		34.2	19.8		32.2	18.5		28.6
250	35		32	34.3		47.4	-0.7		15.4	32.3		45.1	-2.7		13.1	19.8		32	17.8		30	17.8		28
300	38.9		35.3	33.1		45.8	-5.8		10.5	31.1		43.5	-7.8		8.2	18.3		30.1	16.3		28.2	17.3		28.1
350	42.6		38.4	32.1		44.1	-10.4		5.7	30.1		41.9	-12.4		3.5	16.9		28.4	14.9		26.5	16.8		27.4

## Material Specifications

<b>Conductor Material</b>	Bare copper
<b>Insulation Material</b>	FEP
<b>Jacket Material</b>	PVC

## Mechanical Specifications

<b>Pulling Tension, maximum</b>	11.34 kg   25 lb
---------------------------------	------------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Environmental Space</b>	Plenum
<b>Flame Test Method</b>	CMP/FT6

# 4189604/10 | 5524M WHITE REEL

---

**Smoke Test Method** CMP/FT6

## Packaging and Weights

**Cable weight** 66.714 kg/km | 44.83 lb/kft

**Packaging Type** Reel

## Regulatory Compliance/Certifications

### Agency

### Classification

CHINA-ROHS

Below maximum concentration value

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

REACH-SVHC

Compliant as per SVHC revision on [www.commscope.com/ProductCompliance](http://www.commscope.com/ProductCompliance)

ROHS

Compliant

UK-ROHS

Compliant

