

Fiber indoor cable, Low Smoke Zero Halogen Distribution, 24 fiber single-unit, Singlemode G.657.A1, Meters jacket marking, Yellow jacket color



## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor cable
<b>Product Series</b>	N-DS


## General Specifications

<b>Cable Type</b>	Distribution
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-free
<b>Jacket Color</b>	Yellow
<b>Jacket Marking</b>	Meters
<b>Total Fiber Count</b>	24

## Dimensions

<b>Diameter Over Jacket</b>	8.8 mm   0.346 in
-----------------------------	-------------------

## Representative Image

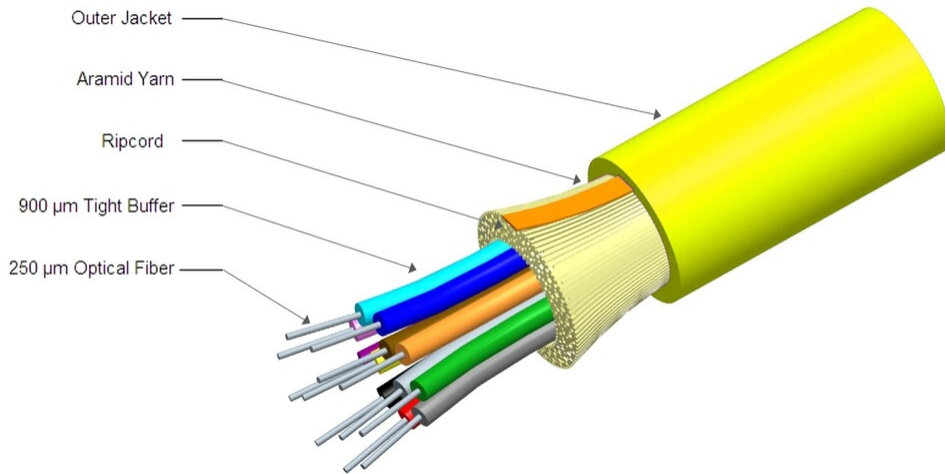

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	176 mm   6.929 in
<b>Minimum Bend Radius, unloaded</b>	88 mm   3.465 in
<b>Tensile Load, long term, maximum</b>	400 N   89.924 lbf
<b>Tensile Load, short term, maximum</b>	1335 N   300.12 lbf
<b>Compression</b>	10 N/mm   57.101 lb/in
<b>Compression Test Method</b>	IEC 60794-1-21 E3
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	IEC 60794-1-21 E1
<b>Twist</b>	10 cycles

## Optical Specifications

**Fiber Type** G.657.A1

## Optical Specifications, Wavelength Specific

**Attenuation, maximum** 0.3 dB/km @ 1,550 nm | 0.4 dB/km @ 1,310 nm

## Environmental Specifications

<b>Installation temperature</b>	-10 °C to +60 °C (+14 °F to +140 °F)
<b>Operating Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)

# 760249374 | N-024-DS-8Z-MSUYL/093

---

<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Flame Test Listing</b>	NEC OFNR (UL) and c(UL)
<b>Flame Test Method</b>	IEC 60332-3   UL 1666   UL 1685

## Environmental Test Specifications

<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	IEC 60794-1-22 F1

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

CS-8Z-TB-0.40/0.30/093 – Low Water Peak, Dispersion-Unshifted Singlemode Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable