

Fiber Optic Cable, Indoor/Outdoor Zero Halogen, Dual listed, Interconnect Cordage

- Indoor/outdoor cables are tough enough for outdoor use while also being listed for indoor use
- Superior mechanical and optical performance with unmatched stability and quality


Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	Z-IC

General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Black

Representative Image

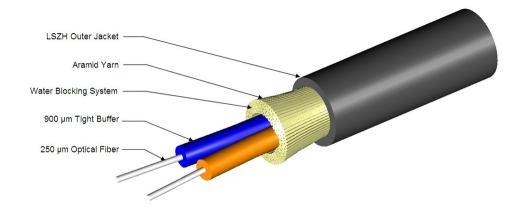

Environmental Specifications

Page 1 of 2

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: June 9, 2023



Z-IC

Installation temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-20 (water penetration) Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Jacket UV Resistance	UV stabilized

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

Page 2 of 2

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: June 9, 2023

