

# MFJM2ACNNB

---



HELIAX® Modular Discrete, 2 multi-mode fiber with Boot (Nokia Boot)  
7662559-2.

## Product Classification

### Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

### Portfolio

CommScope®

### Product Type

Wireless Fiber Cable Assemblies

### Product Brand

HELIAX®

### Product Series

Modular

## General Specifications

### Interface, Connector A

DLC

### Interface Feature, connector A

Standard

### Interface Body Style, connector A

Flex angle

### Interface, Connector B

IP-SN

### Interface Feature, connector B

Outdoor

### Interface Body Style, connector B

Straight

### Jacket Color

Black

### Jacket Marking

Meters

### Total Fibers, quantity

2

## Dimensions

### Cable Assembly Length Range (m)


1 – 100

### Diameter Over Jacket

5.4 mm | 0.213 in

## Ordering Tree

# MFJM2ACNNB

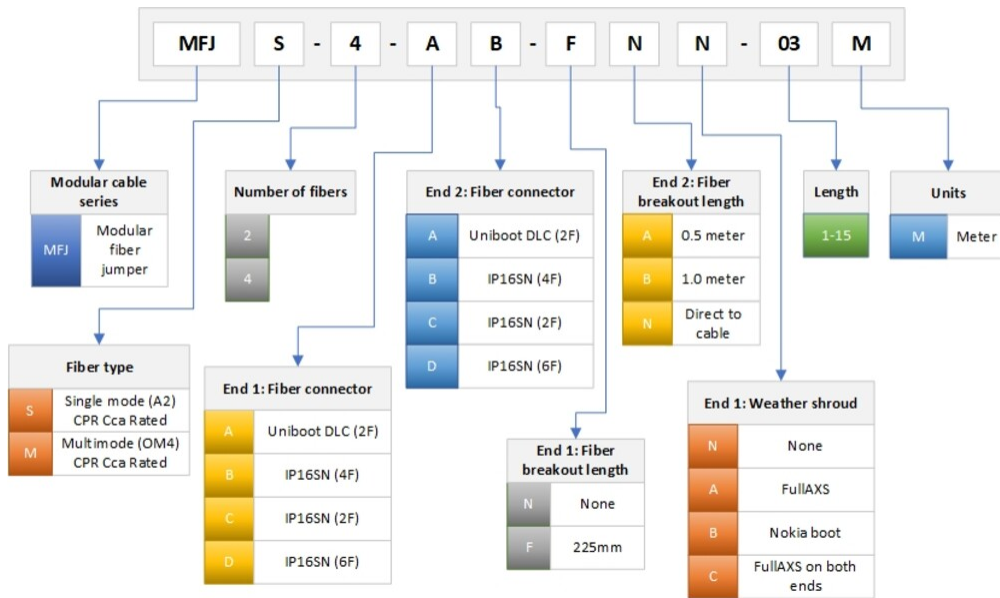

## Material Specifications

### Jacket Material

PE

## Mechanical Specifications

### Minimum Bend Radius

54 mm | 2.126 in

### Minimum Bend Radius, furcation

30 mm | 1.181 in

## Optical Specifications

### Fiber Mode

Singlemode

### Fiber Type

G.657.A2

### Insertion Loss, typical note

Insertion loss is measured at 1310 and 1550 nm

### Insertion Loss, typical

0.5

## Environmental Specifications

### Operating Temperature

-40 °C to +75 °C (-40 °F to +167 °F)

### EN50575 CPR Cable EuroClass Fire Performance

Cca

### Environmental Space

Indoor/Outdoor | Low Smoke Zero Halogen (LSZH)

## Packaging and Weights

### Cable weight

35 kg/km | 23.519 lb/kft

# MFJM2ACNNB

---

\* Footnotes

**Insertion Loss, typical note** Insertion loss is measured at a room temp of +20°C (+68°F)