


RRZZVV-65D-R8N43D

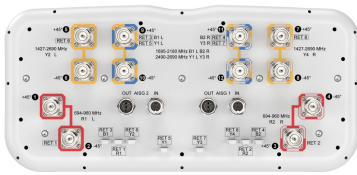

12-port sector antenna, 4x 694–960, 4x 1427–2690 and 4x 1695–2690 MHz, 65° HPBW, 8x RET

- Independent Tilt DIPLEXED Antenna for 1800/2100 and for 2600 MHz when used with 4T4R multi-band radios
- Optimized Antenna to deliver high Pattern Efficiency for improved coverage area and capacity for a given area
- Reduces the amount of aluminum used to minimize CO2 release
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- Retractable tilt indicator rods
- Innovative aerodynamic shape optimized for reduced wind loading in every direction

General Specifications

Antenna Type	Sector
Band	Multiband
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (6)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

RRZZVV-65D-R8N43D

Dimensions

Width	430 mm 16.929 in
Depth	197 mm 7.756 in
Length	2769 mm 109.016 in
Net Weight, antenna only	43.6 kg 96.121 lb

Array Layout

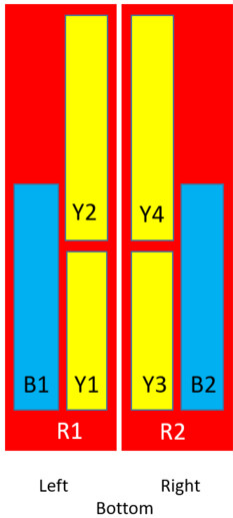


Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	694-960	1-2	1	CPxxxxxxxxxxxxxxxxR1
R2	694-960	3-4	2	CPxxxxxxxxxxxxxxxxR2
B1	1695-2180	9-10	3	CPxxxxxxxxxxxxxxxxB1
B2	1695-2180	11-12	4	CPxxxxxxxxxxxxxxxxB2
Y1	2490-2690	9-10	5	CPxxxxxxxxxxxxxxxxY1
Y2	1427-2690	5-6	6	CPxxxxxxxxxxxxxxxxY2
Y3	2490-2690	11-12	7	CPxxxxxxxxxxxxxxxxY3
Y4	1427-2690	7-8	8	CPxxxxxxxxxxxxxxxxY4

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

RRZZVV-65D-R8N43D

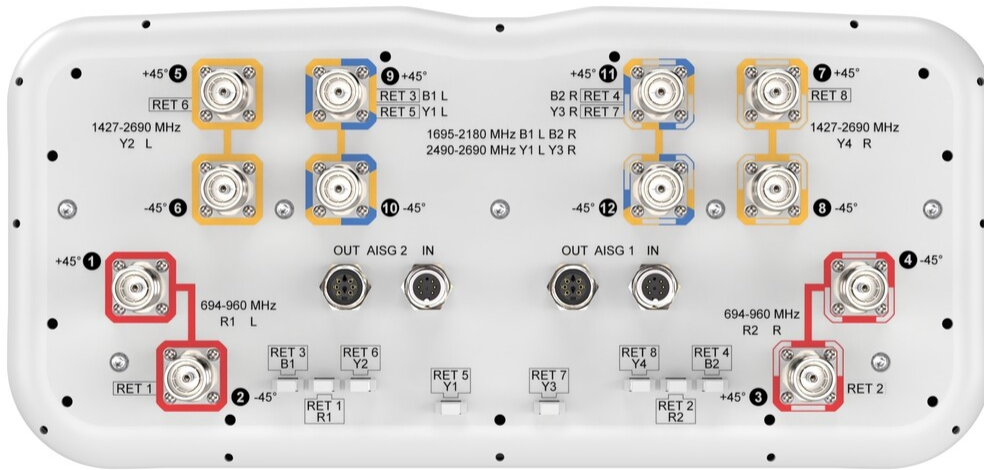

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2690 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y2,Y4	Y2,Y4	Y2,Y4	Y2,Y4	Y2,Y4	Y2,Y4	B1,B2	B1,B2	Y1,Y3
Frequency Band, MHz	698–806	790–894	890–960	1427–1518	1695–1995	1920–2300	2300–2500	2490–2690	1695–1995	1920–2180	2490–2690	
RF Port	1-4	1-4	1-4	5-8	5-8	5-8	5-8	5-8	5-8	9-12	9-12	9-12
Gain at Mid	15.5	16.1	16.3	15.1	17	17.7	18.6	18.3	17	17.6	18.2	

RRZZVV-65D-R8N43D

Tilt, dBi											
Beamwidth, Horizontal, degrees	73	61	59	70	61	57	53	58	70	68	56
Beamwidth, Vertical, degrees	7.6	6.9	6.4	8.1	6.5	5.8	5.1	4.7	5.5	5.1	5
Beam Tilt, degrees	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	16	16	17	17	18	18	17	15	15	15	17
Front-to-Back Ratio at 180°, dB	30	31	29	32	35	35	35	35	33	30	30
Front-to-Back Total Power at 180° ± 30°, dB	22	22	21	23	29	29	29	29	25	25	25
Isolation, Cross Polarization, dB	27	27	27	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	27	27	27	26	26	26	26	26	26	26	26
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	300	250	250	250	200	200	200	200	200

Electrical Specifications, BASTA

Frequency Band, MHz	698-806790-894890-9601427-15181695-19951920-23002300-25002490-26901695-19951920-21802490-2690										
Gain by all Beam Tilts, average, dBi	15.4	16	16.2	15.1	16.9	17.6	18.4	18	16.9	17.5	18

RRZZVV-65D-R8N43D

USLS, beampeak to 20° above beampeak, dB	14	14	14	13	16	14	14	13	14	14	15
CPR at Boresight, dB	20	19	15	16	19	14	18	15	20	21	21
CPR at Sector, dB	13	10	6	3	7	4	4	5	10	8	1

Mechanical Specifications

Wind Loading @ Velocity, frontal	680.0 N @ 150 km/h (152.9 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	347.0 N @ 150 km/h (78.0 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,020.0 N @ 150 km/h (229.3 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	434.0 N @ 150 km/h (97.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	511 mm 20.118 in
Depth, packed	318 mm 12.52 in
Length, packed	2890 mm 113.78 in
Weight, gross	58.3 kg 128.529 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-3F	–	Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	---	--


* Footnotes

RRZZVV-65D-R8N43D

Performance Note

Severe environmental conditions may degrade optimum performance

BSAMNT-3F



Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.

Product Classification

Product Type Fixed tilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 5.6 kg | 12.346 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Weight, gross 5.8 kg | 12.787 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

BSAMNT-3F

