#### **Base Product**



1.8m | 6ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 7.125 – 8.500 GHz

#### **Product Classification**

Product Type Microwave antenna

Product Brand Sentinel®

General Specifications

Antenna Type USX - Sentinel® Ultra High Performance, Super

High XPD Antenna, dual-polarized

PolarizationDualSide Struts, Included1

Side Struts, Optional

Dimensions

**Diameter, nominal** 1.8 m | 6 ft

**Electrical Specifications** 

Operating Frequency Band 7.125 – 8.500 GHz

Gain, Low Band40 dBiGain, Mid Band40.6 dBiGain, Top Band41 dBiBoresite Cross Polarization Discrimination (XPD)40 dBFront-to-Back Ratio75 dB

Beamwidth, Horizontal1.5 °Beamwidth, Vertical1.5 °

Return Loss 26 dB VSWR 1.1

Radiation Pattern Envelope Reference (RPE) 7374

Electrical Compliance ACMA FX03\_7p5a | ETSI 302 217 Class 4

COMMSC PE®

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 3

Mechanical Specifications

**Compatible Mounting Pipe Diameter** 115 mm – 120 mm | 4.5 in – 4.7 in


Fine Azimuth Adjustment Range ±15°
Fine Elevation Adjustment Range ±5°

Wind Speed, operational 200 km/h | 124.274 mph

Wind Speed, survival 200 km/h | 124.274 mph



### Antenna Dimensions and Mounting Information

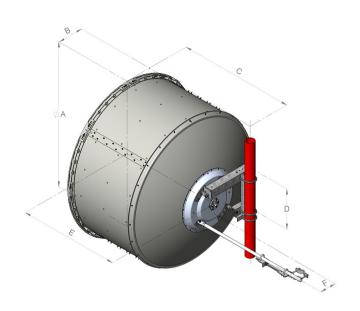

Dimensions in inches (mm)						
Antenna size, ft (m)	А	В	С	D	E	F
6 (1.8)	74.8 (1899)	13.4 (340)	59.8 (1520)	20.9 (530)	51.8 (1315)	8.4 (214)

#### Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)

Angle α for MT Max

Side Force (FS)

**Twisting Moment (MT)** 

Force on Inboard Strut Side

Zcg without Ice

Zcg with 1/2 in (12 mm) Radial Ice

Weight with 1/2 in (12 mm) Radial Ice

6960 N | 1,564.671 lbf

-130°

2049 N | 460.634 lbf

4948 N-m | 43,793.488 in lb

6187 N | 1,390.893 lbf

498 mm | 19.606 in


689 mm | 27.126 in

291 kg | 641.544 lb

**COMMSCOPE®** 



### Wind Forces at Wind Velocity Survival Rating Image

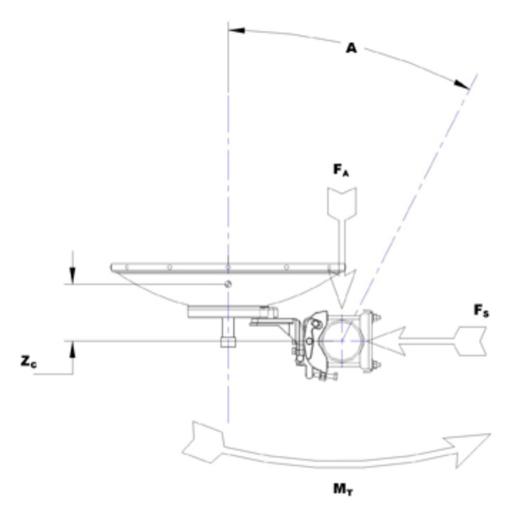

#### Packaging and Weights

**Weight, net** 90 kg | 198.416 lb

### Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

#### \* Footnotes

**Operating Frequency Band** 

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.

Page 5 of 7

Side Force (FS)

Gain, Mid Band For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns. **Boresite Cross Polarization Discrimination (XPD)** The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. Front-to-Back Ratio Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise. **Return Loss** The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted. **VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band. Radiation Pattern Envelope Reference (RPE) Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. For VHLP(X), SHP(X), HX and USX antennas, the wind speed Wind Speed, operational where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees. Wind Speed, survival The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice. Maximum forces exerted on a supporting structure as a Axial Force (FA) result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.



Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this

**Twisting Moment (MT)** 

parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.