

#### Diplexer PCS/AWS+WCS, dc Sense, 4.3-10


- New 4.3-10 connectors for improved PIM performance and size reduction
- Automatic dc switching with dc sense
- BTS-to-feeder and feeder-to-antenna application
- Convertible mounting brackets


Product Classification	
Product Type	Diplexer
General Specifications	
Product Family	CBC1923
Color	Gray
Common Port Label	Common
Modularity	1-Single
RF Connector Interface	4.3-10 Female
RF Connector Interface Body Style	Long neck
Dimensions	
Height	176.5 mm   6.949 in
Width	140 mm   5.512 in
Depth	63.5 mm   2.5 in
Ground Screw Diameter	6 mm   0.236 in


Page 1 of 5



### Outline Drawing



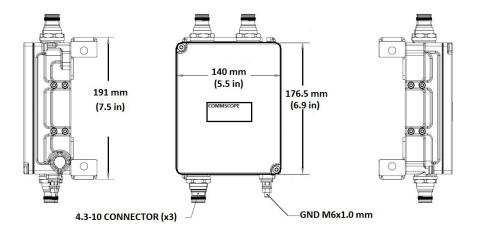



### **Electrical Specifications**

Impedance	50 ohm		
License Band, Band Pass	AWS 1700   PCS 1900   TDD 1900   WCS 2300		
Electrical Specifications, Common Port			
Composite Power, RMS	250 W		
Electrical Specifications, dc Power/Alarm			
dc/AISG Pass-through Method	AISG Pass-through Method Auto sensing		

dc/AISG Pass-through Path See logic table

Lightning Surge Current 10 kA

Page 2 of 5



Lightning Surge Current Waveform	8/20 waveform		
Voltage	7-30 Vdc		
Electrical Specifications, AISG			
AISG Carrier	2176 KHz ± 100 ppm		

Insertion Loss, maximum	1 dB
Return Loss, minimum	15 dB

### Electrical Specifications

Sub-module	1	1
Branch	1	2
Port Designation	PCS	AWS-WCS
License Band	PCS 1900, Band Pass	AWS 1700, Band Pass WCS 2300, Band Pass


### Electrical Specifications, Band Pass

Frequency Range, MHz	1850-1995	1695–1780 2110–2200 2305–2360
Insertion Loss, typical, dB	0.2	0.2
Total Group Delay, typical, ns	13	12
Return Loss, typical, dB	22	22
Isolation, typical, dB	58	53
Input Power, RMS, maximum, W	200	200
Input Power, PEP, maximum, W	2000	2000
3rd Order PIM, minimum, dBc	-161	
3rd Order PIM Test Method	2 x 20 W CW tones	
Higher Order PIM, minimum, dBc		-161
Higher Order PIM Test Method		2 x 20 W CW tones

### Block Diagram

Page 3 of 5



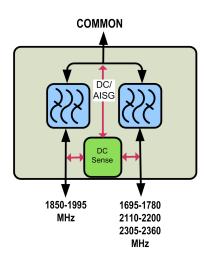

Page 4 of 5

©2023 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

**COMMSCOPE**°

### Logic Table

Combining M	ode Operation (G	round Based)	
RF Ports Input DC Voltage		ltage	
PCS	AWS/WCS	COMMON	DC/AISG Path Selection
7 ≤ V ≤ 30	<7	<7	PCS to COMMON "ON"
<7	7 ≤ V ≤ 30	<7	AWS/WCS to COMMON "ON"
7 ≤ V ≤ 30	7 ≤ V ≤ 30	<7	AWS/WCS to COMMON "ON"

Splitting N	Node Operation (T	ower Top)	
RF Ports Im	pedance DC (Lo	ad sensing)	
PCS	AWS/WCS	COMMON	DC/AISG Path Selection
open/load	short	7 ≤ V ≤ 30	COMMON to PCS "ON"
short	open/load	7 ≤ V ≤ 30	COMMON to AWS/WCS "ON"
open/load	open/load	7 ≤ V ≤ 30	ALL ports ON
short	short	7 ≤ V ≤ 30	ALL ports OFF

#### Material Specifications

Finish	Painted
Mechanical Specifications	
Wind Loading @ Velocity, frontal	31.0 N @ 150 km/h (7.0 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	6.0 N @ 150 km/h (1.3 lbf @ 150 km/h)

#### **Environmental Specifications**

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	Up to 100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67

#### Packaging and Weights

Included	Mounting hardware
Mounting Hardware Weight	0.5 kg   1.102 lb
Volume	1.5 L
Weight, without mounting hardware	2.2 kg   4.85 lb

Page 5 of 5

