

#### Twin Quadplexer, 700/850/PCS-AWS/WCS,DC Sense, 4.3-10

- BTS-to-feeder and feeder-to-antenna application
- Automatic dc switching with dc sense
- Convertible mounting brackets
- New 4.3-10 connectors for improved PIM performance and size reduction
- DC Load Sense in Feeder-to-Antenna applications

#### **Product Classification**

Product Type Quadplexer

#### General Specifications

**Color** Gray

Common Port LabelCommonModularity2-Twin

Mounting Pole | Wall

RF Connector Interface 4.3-10 Female

**RF Connector Interface Body Style**Long neck

#### **Dimensions**

 Height
 202 mm | 7.953 in


 Width
 248 mm | 9.764 in

 Depth
 114 mm | 4.488 in

 Ground Screw Diameter
 6 mm | 0.236 in

#### Outline Drawing



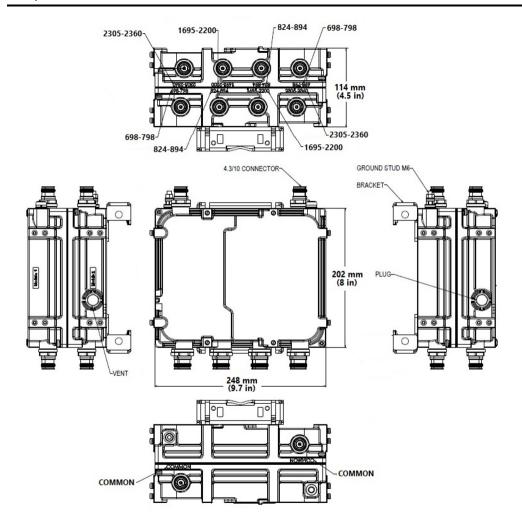

#### **Electrical Specifications**

**Impedance** 50 ohm

**License Band, Band Pass**AWS 1700 | CEL 850 | LMR 750 | PCS 1900 | USA 700 | USA 750 | WCS

2300

#### Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through MethodAuto sensingdc/AISG Pass-through PathSee logic table

**Lightning Surge Current** 5 kA

**Lightning Surge Current Waveform** 8/20 waveform

Operating Current at Voltage 15 mA @ 12 V | 15 mA @ 24 V

**Voltage** 7–30 Vdc



#### Electrical Specifications, AISG

**AISG Carrier** 2176 KHz ± 100 ppm

Insertion Loss, maximum1 dBReturn Loss, minimum15 dB

#### **Electrical Specifications**

Sub-module	1	1	1	1
Branch	1	2	3	4
Port Designation	698-798	824-894	AWS-PCS	WCS

License Band

LMR 750, Band Pass

CEL 850, Band Pass

PCS 1900, Band Pass

WCS 2300, Band Pass

USA 700, Band Pass USA 750, Band Pass

#### Electrical Specifications, Band Pass


Frequency Range, MHz	698-798	824-894	1695-2200	2305-2360
Insertion Loss, typical, dB	0.3	0.3	0.3	0.3
Total Group Delay, maximum, ns	40	40	20	25
Return Loss, minimum, dB	20	20	20	20
Isolation, minimum, dB	50	50	50	50
Input Power, RMS, maximum, W	200	200	200	200
Input Power, PEP, maximum, W	2000	2000	2000	2000
3rd Order PIM, minimum, dBc	-155	-155	-155	
3rd Order PIM Test Method	2 x 20 W CW tones	2 x 20 W CW tones	1 x 20 W AWS CW tone 1 x 20 W PCS CW tone	

Higher Order PIM, minimum, dBc -155

**Higher Order PIM Test Method** 2 x 20 W CW tones

#### Block Diagram



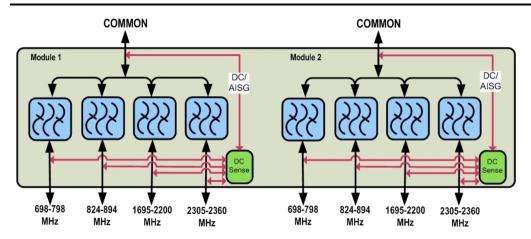

#### Logic Table

		Combining Mode Operation (Bottom)  RF Ports Input Voltage				
DC/AISG Path Selection	COMMON	2305 to 2360 MHz	1695-2200 MHz	824-894 MHz	598-798 MHz	
698-798 MHz "OFF" 824 to 894 MHz "OFF" 1695-2200 MHz to COMMON"ON" 2305 to 2360 MHz "OFF"	47	Any*	7 ≤ V ≤ 30	Any*	Any*	
698-798 MHz to COMMON "ON" 824-894 MHz "OFF" 1695-2200 MHz "OFF" 2305 to 2360 MHz "OFF"	<7	Any*	<7	Any*	7 ≤ V ≤ 30	
698-798 MHz "OFF" 824-894MHz "OFF" 1695-2200 MHz "OFF" 2305 to 2360 MHz to COMMON "ON"	a	7 ≤ <b>V</b> ≤ 30	<7	Any*	<7	
698-798 MHz "OFF" 824-894 MHz to COMMON "ON" 1695-2200 MHz "OFF" 2305 to 2360 MHz "OFF"	4	<7	<7	7 ≤ V ≤ 30	<7	
ALL PORTS OFF	<7	<7	<7	<7	<7	

<sup>\*</sup> Any DC voltage applied in the ON (7-30V) or OFF (< 7V) ranges

Splitting Mode Operation (Tower Top)					
RF Ports Impedance DC (Load Sense)					
698-798 MHz	824-894 MHz	1695-2200MHz	2305 to 2360 MHz	COMMON	DC/AISG Path Selection
Short	Short	Short	Short	7 ≤ V ≤ 30	ALL PORTS OFF
Open/ Load	Open/ Load	Open/ Load	Open/ Load	7 ≤ V ≤ 30	ALL PORTS ON
	One or more port	t(s) are Open/ Load		7 ≤ V ≤ 30	DC/AISG will be be passed to ALL Open/Load port(s)

One or more port(s) are Open/ Load

Note: In this mode DC/AISG will be passed to all detected ports and blocked at shorted ones

### **Environmental Specifications**

**Operating Temperature**  $-40 \,^{\circ}\text{C} \text{ to } +65 \,^{\circ}\text{C} \, (-40 \,^{\circ}\text{F to } +149 \,^{\circ}\text{F})$ 

**Corrosion Test Method** IEC 60068-2-11, 30 days

**Ingress Protection Test Method** IEC 60529:2001, IP67

Packaging and Weights

**Included** Mounting hardware

Volume 5.7 L

Weight, without mounting hardware 6.8 kg | 14.991 lb



### Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant

