

Fiber indoor/outdoor cable, LightScope ZWP®, Single Jacket All-Dielectric, Plenum Rated, 96 fiber, Singlemode G.652.D and G.657.A1, Gel-Free, Stranded Loose Tube, PVDF jacket, Feet jacket marking, Black jacket color

## Product Classification

### Regional Availability

Asia | Australia/New Zealand | Latin America | Middle East /Africa | North America

### Portfolio

CommScope®

### Product Type

Fiber indoor/outdoor cable

### Product Series

P-LN

## General Specifications

### Cable Type

Stranded loose tube

### Construction Type

Non-armored

### Subunit Type

Gel-free

### Jacket Color

Black

### Jacket Marking

Feet

### Subunit, quantity

8

### Fibers per Subunit, quantity

12

### Total Fiber Count

96

## Dimensions



### Buffer Tube/Subunit Diameter

2.5 mm | 0.098 in

### Diameter Over Jacket

11.6 mm | 0.457 in

## Representative Image

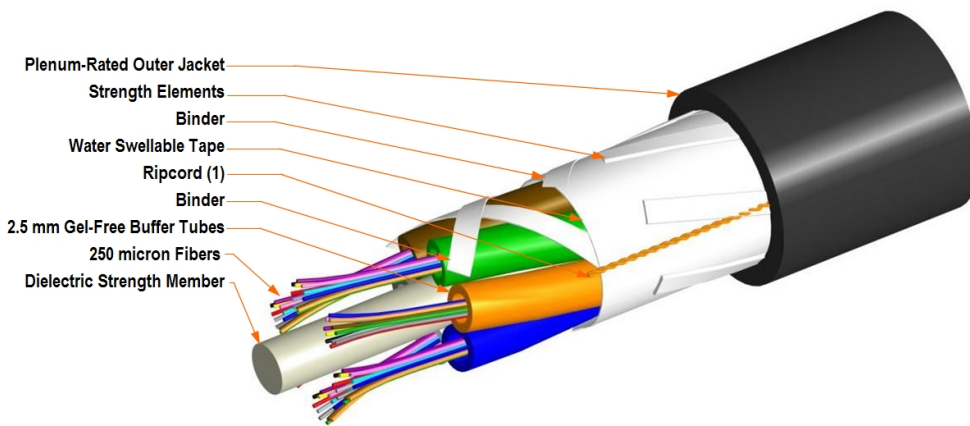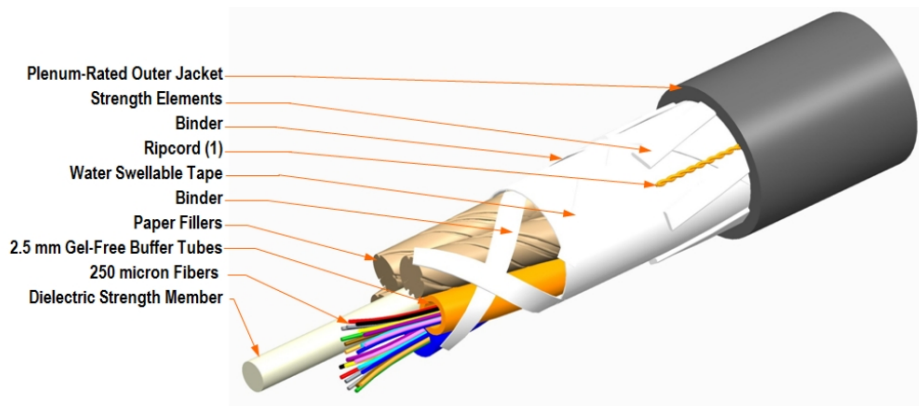

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	174 mm   6.85 in
<b>Minimum Bend Radius, unloaded</b>	116 mm   4.567 in
<b>Tensile Load, long term, maximum</b>	800 N   179.847 lbf
<b>Tensile Load, short term, maximum</b>	2700 N   606.984 lbf
<b>Compression</b>	22 N/mm   125.623 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	25 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles

# 8108077/DB | P-096-LN-8W-F12BK/25D

**Twist Test Method** FOTP-85 | IEC 60794-1 E7

**Vertical Rise, maximum** 584 m | 1,916.011 ft

## Optical Specifications

**Fiber Type** G.652.D and G.657.A1 | G.652.D and G.657.A1

## Environmental Specifications

**Installation temperature** -30 °C to +70 °C (-22 °F to +158 °F)

**Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)

**Storage Temperature** -40 °C to +75 °C (-40 °F to +167 °F)

**Cable Qualification Standards** ANSI/ICEA S-104-696 | EN 187105 | Telcordia GR-409

**Environmental Space** Plenum

**Flame Test Listing** NEC OFNP (ETL) and c(ETL)

**Flame Test Method** NFPA 130 | NFPA 262

**Jacket UV Resistance** UV stabilized

**Water Penetration** 24 h

**Water Penetration Test Method** FOTP-82 | IEC 60794-1 F5

## Environmental Test Specifications

**Cable Freeze** -2 °C | 28.4 °F

**Cable Freeze Test Method** FOTP-98 | IEC 60794-1 F15

**Heat Age** -40 °C to +85 °C (-40 °F to +185 °F)

**Heat Age Test Method** IEC 60794-1 F9

**Low High Bend** -30 °C to +60 °C (-22 °F to +140 °F)

**Low High Bend Test Method** FOTP-37 | IEC 60794-1 E11

**Temperature Cycle** -40 °C to +70 °C (-40 °F to +158 °F)

**Temperature Cycle Test Method** FOTP-3 | IEC 60794-1 F1

## Packaging and Weights

**Cable weight** 140 kg/km | 94.076 lb/kft

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## Included Products

DB-8W-LT – LightScope ZWP® Singlemode  
Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

# DB-8W-LT



## LightScope ZWP® Singlemode Fiber

### Product Classification

<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Optical fiber

### General Specifications

<b>Cladding Diameter</b>	125 µm
<b>Cladding Diameter Tolerance</b>	±0.7 µm
<b>Cladding Non-Circularity, maximum</b>	0.7 %
<b>Coating Diameter (Colored)</b>	249 µm
<b>Coating Diameter (Uncolored)</b>	242 µm
<b>Coating Diameter Tolerance (Colored)</b>	±13 µm
<b>Coating Diameter Tolerance (Uncolored)</b>	±5 µm
<b>Coating/Cladding Concentricity Error, maximum</b>	12 µm
<b>Core Diameter</b>	8.3 µm
<b>Core/Clad Offset, maximum</b>	0.5 µm
<b>Proof Test</b>	689.476 N/mm <sup>2</sup>   100000 psi

### Dimensions

<b>Fiber Curl, minimum</b>	4 m   13.123 ft
----------------------------	-----------------

### Mechanical Specifications

<b>Macrobending, 20 mm Ø mandrel, 1 turn</b>	0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm
<b>Macrobending, 30 mm Ø mandrel, 10 turns</b>	0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm
<b>Macrobending, 60 mm Ø mandrel, 100 turns</b>	0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm
<b>Coating Strip Force, maximum</b>	8.9 N   2.001 lbf
<b>Coating Strip Force, minimum</b>	1.3 N   0.292 lbf
<b>Dynamic Fatigue Parameter, minimum</b>	20

### Optical Specifications

<b>Cabled Cutoff Wavelength, maximum</b>	1260 nm
<b>Point Defects, maximum</b>	0.1 dB

# DB-8W-LT

<b>Zero Dispersion Slope, maximum</b>	0.092 ps/[km-nm-nm]
<b>Zero Dispersion Wavelength, maximum</b>	1324 nm
<b>Zero Dispersion Wavelength, minimum</b>	1300 nm

## Optical Specifications, Wavelength Specific

<b>Attenuation, maximum</b>	0.22 dB/km @ 1,550 nm   0.25 dB/km @ 1,490 nm   0.25 dB/km @ 1,625 nm   0.36 dB/km @ 1,310 nm   0.36 dB/km @ 1,385 nm
<b>Attenuation, typical</b>	0.19 dB/m @ 1,550 nm   0.33 dB/m @ 1,310 nm
<b>Backscatter Coefficient</b>	-79.6 dB @ 1,310 nm   -82.1 dB @ 1,550 nm
<b>Dispersion, maximum</b>	18 ps(nm-km) at 1550 nm   3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm
<b>Index of Refraction</b>	1.467 @ 1,310 nm   1.467 @ 1,385 nm   1.468 @ 1,550 nm
<b>Mode Field Diameter</b>	10.4 $\mu\text{m}$ @ 1,550 nm   9.2 $\mu\text{m}$ @ 1,310 nm   9.6 $\mu\text{m}$ @ 1,385 nm
<b>Mode Field Diameter Tolerance</b>	$\pm 0.4 \mu\text{m}$ @ 1310 nm   $\pm 0.5 \mu\text{m}$ @ 1550 nm   $\pm 0.6 \mu\text{m}$ @ 1385 nm
<b>Polarization Mode Dispersion Link Design Value, maximum</b>	0.04 ps/sqrt(km)
<b>Standards Compliance</b>	ITU-T G.652.D   ITU-T G.657.A1

## Environmental Specifications

<b>Heat Aging, maximum</b>	0.05 dB/km @ 85 °C
<b>Temperature Dependence, maximum</b>	0.05 dB/km
<b>Temperature Humidity Cycling, maximum</b>	0.05 dB/km
<b>Water Immersion, maximum</b>	0.05 dB/km @ 23 °C

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## \* Footnotes

<b>Temperature Dependence, maximum</b>	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
<b>Temperature Humidity Cycling, maximum</b>	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F)

# DB-8W-LT

---

up to 95% relative humidity